


| REV | DESCRIPTION | DATE |
|-----|-------------|------|
|     |             |      |
|     |             |      |

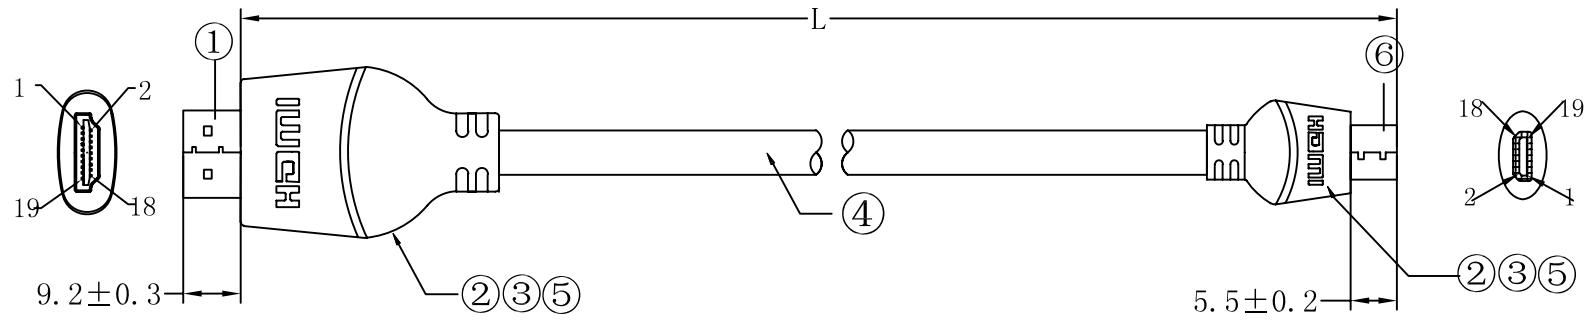


VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable With Ethernet

A

B

| Cable length (L) | Tolerance (T) |
|------------------|---------------|
| 1800             | 20            |
| 3000             | 30            |

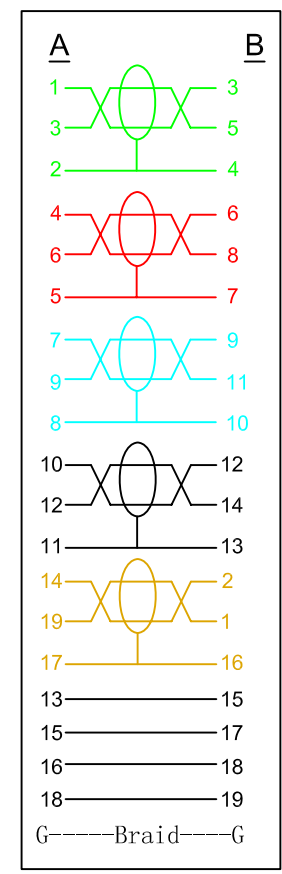

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN);
3. Conduction Resistance: 10ohm (MAX) at 300V DC/0.01S .

NOT: COAX

| NO. | MATERIAL DESCRIPTION   | MATERIAL NUMBER | UNIT | QTY | MOLD NO. : |
|-----|--|-----------------|------|-----|------------|
| ⑥   | CONN:HDMI D Type, Male, 19PIN SOLDERING TYPE GOLD PLATED                                       |                 | PCS  | 1   |            |
| ⑤   | INNER MOLDING:HDPE   |                 | EACH | 1   |            |
| ④   | CABLE: [(30AWG*1P+DW+AL Foil+MYLAR)*5P+1P+2C]+AL Foil+DW+BD 1.4V, OFC Conductor BLACK OD:6.0mm |                 | mm   | L   |            |
| ③   | OVER MOLDING 2:45P PVC ORANGE  |                 | EACH | 1   |            |
| ②   | OVER MOLDING 1:50P PVC BLACK   |                 | EACH | 1   |            |
| ①   | CONN:HDMI A Type, Male, 19PIN SOLDERING TYPE GOLD PLATED                                       |                 | PCS  | 1   |            |

**VCOM International Ltd.**

|             |                   |              |     |              |            |              |
|-------------|-------------------|--------------|-----|--------------|------------|--------------|
| TITLE       | HDMI A/M-D/M 1.4V | CUSTOMER     |     | UNIT         | mm         | PAGE: 1 of 1 |
| PART NO.    | VC-F14-0022       | CUSTOMER NO. |     |              |            |              |
| PRODUCT NO. | CG586             | REV          | A/0 | DATE         | 2017-04-28 |              |
| DRAWN BY:   | Xiang             | CHECKED BY:  |     | APPROVED BY: |            |              |