



VCOM PATCH CORD CABLE CAT6 4PAIR UTP 23AWG 60°C TIA/EIA 568-B.2-1 OR ISO/IEC11801 VERIFIED (A group of black lettering)

REV	Change record	Change the date
A/0	Initial issue	2017-04-26

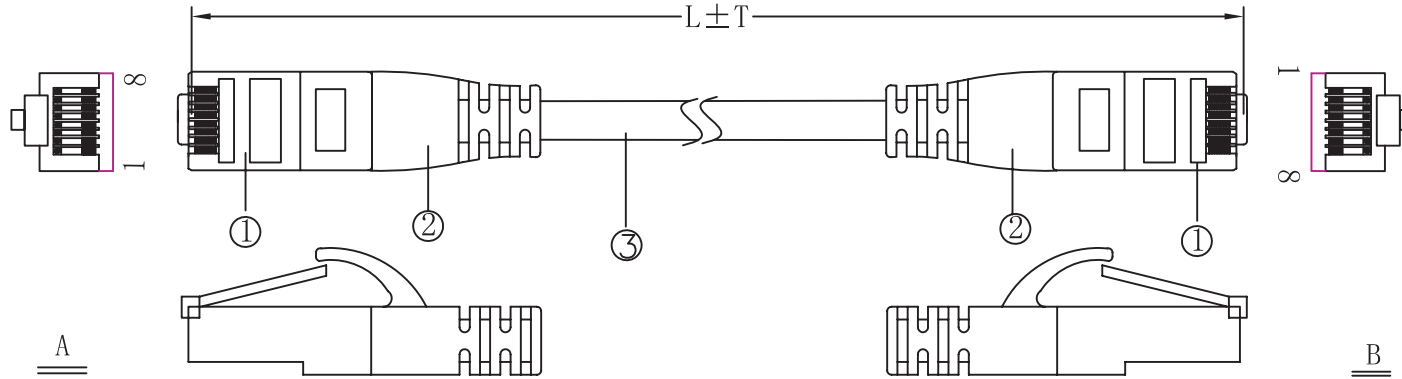

PINOUT DIAGRAW:

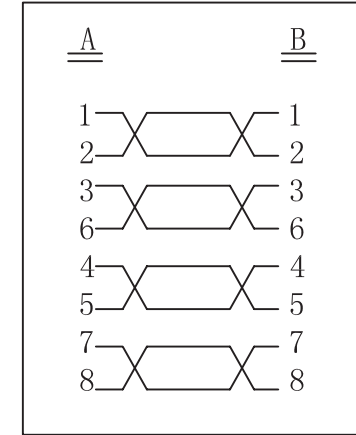

the twist pairs

NO.	Cable length (L)	Cable tolerance (T)	NO.	Cable length (L)	Cable tolerance (T)
1	500MM	10MM	8	15000MM	150MM
2	1000MM	10MM	9	20000MM	200MM
3	1500MM	15MM			
4	2000MM	20MM			
5	3000MM	30MM			
6	5000MM	50MM			
7	10000MM	100MM			

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN);
3. Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .

**VCOM International Ltd.**

TITLE	PATCH CORD	CUSTOMER	UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F01-0002	CUSTOMER NO.	SCALE		
PRODUCT NO.	NP611B	REV	A/0	DATE	2017/04/26
APPROVED BY:	CHECKED BY:	DRAWN BY: CT			

NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY
③	CABLE:23AWG*4P+PE CROSS+ PVC JACKET GREY OD: 6.0±0.2mm		mm	1500
②	OVER MOLDING:PVC-50P GREY PVC		g	
①	RJ45 PLUG:"VCOM"LOGO 8P8C, Fu		PCS	2