


VCOM USB 2.0 CABLE 80°C 30V (A group of black lettering)

REV	DESCRIPTION	DATE
A/0	Initial issue	2017-04-26

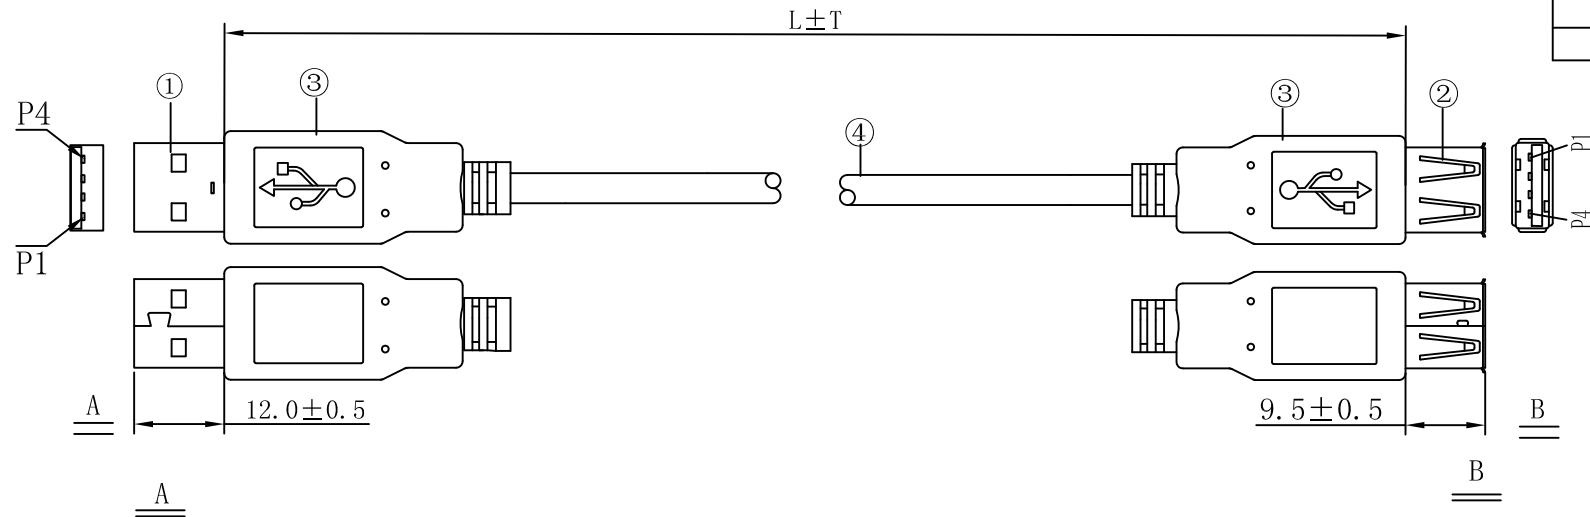

WIRING TABLE:

<u>A</u>	<u>B</u>
1 ---Red---	1
2 White---	2
3 Green---	3
4 ---Black---	4
G ---DW+BD---	G

Twist pair

NO.	Cable length (L)	Cable tolerance (T)
1	1500MM	20MM
2	1800MM	20MM
3	3000MM	30MM
4	4500MM	50MM
5	5000MM	50MM

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN) ;
3. Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .

VCOM INTERNATIONAL LTD.

ITEM	USBAM-USBAF	CUSTOMER	AC	UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F02-0019	CUSTOMER NO.		UNIT		
PRODUCT NO.		REV		A/0	DATE	2017-04-26
APPROVED BY:	CHECKED BY:		DRAWN BY: CT			

④	CABLE:USB2.0[30#*1P+28#*2C+AL FOIL+DW+BD] OD:4.5±0.2mm, PVC JACKET, TRANSPARENT		mm		
③	OVER MOLDING:PVC-50P TRANSPARENT PVC		g		
②	PLUG:USB A FEMALE SOLDERING TYPE, NICKEL-PLATED, PBT WHITE COLOR	SET		1	
①	PLUG:USB A MALE SOLDERING TYPE, NICKEL-PLATED PBT WHITE COLOR	SET		1	
NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY	