

8*10/100/1000Base-T + 2*1G/2.5G/10G Base-X SFP+

Layer 2+ Managed Industrial PoE Switch

DK3310MI-8TP2X



Features:

- 8*10/100/1000Base-T RJ45 PoE, 2*1G/2.5G/10GBase-X SFP+
- DC 44-57V input, redundant power supply with polarity reverse/over-voltage protection
- Support one digital output for relay alarm (terminal block Pin 5/6)
- Complies with IEEE802.3af PoE and IEEE802.3at PoE+ standard
- Layer 3 features: Support IPv4/IPv6 static routing, DHCP server
- Support Layer 2 management function: VLAN/VLAN Classification/QinQ/STP, RSTP,MSTP /Port Mirroring/DHCP/Multicast/ACL/IGMP/QoS/LLDP/802.1X/Dying Gasp/SFP DDM /IPV6 management/PoE management/Web/SNMP/Telnet/TFTP/Web upgrading
- Support G.8032 ERPS protocol, recovery time $\leq 20\text{ms}$
- Support 6KV surge protection and ESD: Air-15kV, Contact-8kV Protection
- IP40 fan-less and Din-rail hardware design
- Operation temperature: $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$

Overview

The DPTEK DK3310MI-8TP2X is the highly reliable managed industrial PoE switch with 8-port 10/100/1000-T RJ45, 2-port 1G/2.5G/10GBase-X SFP+ interfaces. It complies with IEEE802.3af, IEEE802.3at standard PoE protocol, the Max power consumption can reach 30W (PoE+) per port. It supports ERPS redundant network and the self-recovery mechanism is less than 20ms on full load which allows you to scheme a reliable Ethernet network by building a redundant ring topology as your back-up solution. DK3310MI-8TP2X also supports Layer 3 IPv4/IPv6 static routing features and powerful Layer 2 management and secure function, which all making them ideal for large-scale industrial networks.

DK3310MI-8TP2X is a high cost-effective easy-to-use device, which provides essential industrial Ethernet networking function, including wide range power input 44-57VDC, redundant power design with polarity reverse/over-voltage/over-current protection, robust IP40 fan-less housing with Din-rail installation, wide operation temperature from -40°C to 75°C as well as high-level EMI/EMC capability. It is the best choice for heavy industrial factory, transportation, oil & gas, chemical, IP Surveillance and processing automation area where environmental conditions are harsh and critical

Technical specification

Model No.	DK3310MI-8TP2X	
Interface	Fiber ports	Copper RJ45 ports
	2	8
Ethernet	8*10/100/1000Base-T RJ45 PoE 2*1G/2.5G/10G Base-X SFP+	
Management port	1*RJ45 Console port (115200,8,N,1)	
Alarm port	One digital output for relay alarm, alarm relay current carry ability: 1A@24VDC	
Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Ethernet IEEE 802.3ab 1000Base-T Ethernet IEEE 802.3z 1000Base-X Ethernet IEEE802.3x Flow Control and Back Pressure IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1Q VLAN ITU-T G.8032 ERPS IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ad LACP IEEE802.3af PoE IEEE802.3at PoE+	

LED Indicators		
P (Power indicator)	Off: the device is power off or failed	On: the device power on is normal
S (System status indicator)	Blinking: device initialization	On: device on normal operation
1-8 (Copper ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
1-8 (PoE status indicators) Yellow	Off: PoE not working	
	On: PoE working	
9-12 (Fiber ports indicators) Green	Off: ports link down	
	On: ports link up	
	Blinking: data on TX/RX	
Power parameter		
Input voltage	44-57VDC(802.3af) 52-57VDC(802.3at) redundant power input	
Input current	5.8A Max	
Total power consumption	Full loading without PoE $\leq 18W$ PoE power budget $\leq 240W$	
Connector	Removable 6-pin terminal block, Pin 5-6 for relay alarm	
Reverse polarity protection	Support	
Over-voltage protection	Support	
Over-current protection	Support	
Layer 2 functions		
Port aggregation	Support GE port aggregation Support 2.5GE aggregation Support 10GE aggregation Support static aggregation Support LACP dynamic aggregation Up to 64 aggregation groups and up to 8 ports per group	
Port features	Support IEEE802.3x flow control, Support interface counters, Support port isolation, Port mirroring (One-to-One, Many-to-One) Support loop detection(Port-based; VLAN-based) Support broadcast storm suppression(broadcast; unknown multicast; unknown unicast)	


Mac-address table management	<ul style="list-style-type: none"> Support static Mac-address management Support dynamic Mac-address Management Support filtering Mac-address Support MAC limit based on port and VLAN Support MAC flapping based on port and VLAN
VLAN	<ul style="list-style-type: none"> Support access mode Support trunk mode Support hybrid mode
VLAN classification	<ul style="list-style-type: none"> Mac Based VLAN IP Based VLAN Protocol Based VLAN
GVRP	<ul style="list-style-type: none"> Normal mode Fixed mode Forbidden mode
QinQ	<ul style="list-style-type: none"> Port-based QinQ VLAN-based QinQ (VLAN-stacking; VLAN-mapping) Flow-based QinQ
LLDP	LLDP (Link Layer Discovery Protocol)
Ring network protocol	<ul style="list-style-type: none"> Support IEEE802.1D-STP Support IEEE802.1W-RSTP Support IEEE802.1S-MSTP Support G.8032 ERPS protocol, single ring, sub Ring and major ring Recovery time $\leq 20\text{ms}$
L2 Multicast	
IGMP snooping	Support IGMP snooping
Group address	Support group address
Security functions	
ACL	<ul style="list-style-type: none"> IP Standard ACL MAC extend ACL IP extend ACL IPv6 ACL
QoS	<ul style="list-style-type: none"> Support QoS Class, remarking Support SP, WRR queue scheduling Ingress port-based rate-limit Egress port-based rate-limit Support policy-based QoS
802.1x	<ul style="list-style-type: none"> Port access control Mac-address access control RADIUS server
Port-security	Port-security
IP source guard	IP Port/MAC binding

ARP-check	Support ARP-check and ARP packet filtering for illegal users
Access control	Support Telnet/SSH/HTTP/HTTPS user access control
Management & Maintenance functions	
User Management	Support password protection Support user authorization management
SNMP	Supporting SNMP V1/V2C/V3 version
Web Management	Web Management Support HTTP V1.1 Support HTTPS
CLI management	Console/Telnet command line management
RMON	Support RMON(Remote Monitoring) alarm
Firmware upgrade	Firmware upgrade
Fault Detection	Ping/Traceroute Dying gasp Support optical transceiver DDM function
Cable detection	Support copper port cable detection
PoE management	Support 802.3af/802.3at
	Support PD watchdog
	Support PoE priority management
	Support Max PoE power configuration for each port
	Support alarm threshold configuration
	Support reserved power configuration
NTP	Network Time Protocol
Syslog/Debug	Syslog/Debug Syslog send to three servers
Configuration import/export	Support FTP/TFTP remote import/export
Dual partition management	Support dual partition switching
Application Protocol Functions	
DHCP Snooping	DHCP snooping trust port Support remote-id/circuit-id configuration DHCP option-82
DHCP client	Support DHCP client
Telnet server	Support telnet server
Telnet client	Support telnet client
SSH server	Support SSH server

TACACS	Support TACACS(the terminal access controller accesses the control system)
sflow	Support network traffic analysis
TFTP	Support TFTP Client
Layer 3 functions	
ARP	ARP table aging
DHCP server	
IPv4 / IPv6	static routing
Switching features	
Switching capacity	56Gbps
Packet forwarding rate	41.664Mpps
MAC address table	16K
VLAN	4K
Buffer	12Mbit
Forwarding delay	<5us
Jumbo Frame	Support 10Kbytes
MDX/MIDX	Support
Watchdog	Support
Mechanical structure	
Case protection	IP40
Installation method	Din-rail
Dimension(W*D*H)mm	54*115*158mm
Weight	1.25 kg
Operating environment	
Operating temperature	-40°C~+75°C
Storage/transportation temperature	-40°C~+85°C
Relative humidity	Operation humidity: 10%-90%RH Storage humidity: 5%-95%RH
Industrial Standard	
EMS	Surge protection of power: IEC 61000-4-5 6KV/4KV(8/20us) Surge protection of Ethernet ports: IEC 61000-4-5 6KV/2KV(10/700us) RS: IEC 61000-4-3 80 MHz-1 GHz: 10 V/m EFT: IEC 61000-4-4 4K/2K CS: IEC 61000-4-6 10V ESD: IEC 61000-4-2 Contact: 8K; Air: 15K

EMI	FCC Part 15B Class A
Shock	IEC 60068-2-27
Free fall	IEC 60068-2-32
Vibration	IEC 60068-2-6
Certification	CE/FCC/RoHS
MTBF	> 200,000 hours
Warranty	5 years

Structure diagram

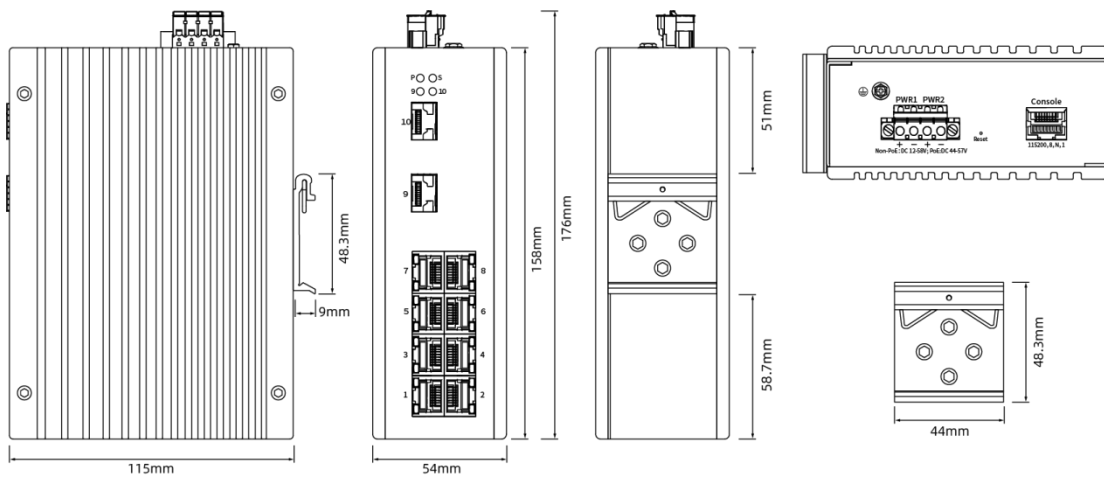

Order information

Model	Description
DK3310MI-8TP2X	Layer 2+ Managed industrial PoE switch with 8*10/100/1000Base-T RJ45 PoE ports and 2*1G/2.5G/10G Base-X SFP+ slots, complies with IEEE802.3af, IEEE802.3at standard, DC44-57V input, redundant dual power supply, Din-rail installation. Operation temperature: -40°C ~ +75°C