




REV	DESCRIPTION	DATE
A/0	Initial issue	2017-05-08

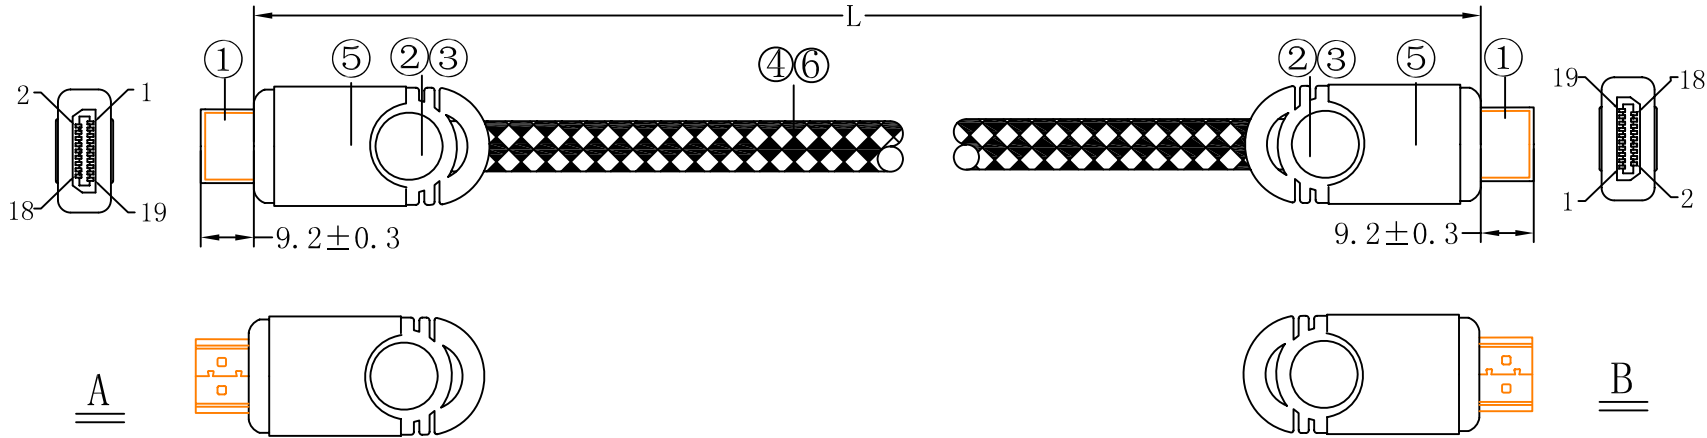

Cable length (L)	Tolerance (T)
10000	100

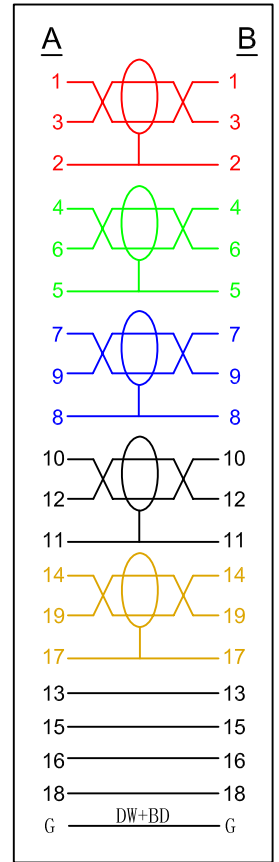

NOT:  COAX


#### Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN);
3. Conduction Resistance: 10ohm (MAX) at 300V DC/0.01S .

NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY	MOLD NO. :
⑥	Cotton mesh: silver & black		mm	L	
⑤	Shell:Aluminum		PCS	2	
④	CABLE: [(28AWG*1P+DW+AL Foil+MYLAR)*5P+1P+2C]+AL Foil+DW+BD 1.4V, OFC Conductor BLACK OD:7.5mm(With Mesh)		mm	L	
③	OVER MOLDING 2:45P PVC ORANGE		EACH	1	
②	INNER MOLDING:HDPE		EACH	1	
①	CONN:HDMI A Type, Male, 19PIN SOLDERING TYPE GOLD PLATED		PCS	2	



**VCOM International Ltd.**

TITLE	HDMI A/M-A/M, 1.4V	CUSTOMER		UNIT	mm	PAGE:	1 of 1
PART NO.	VC-F14-0023B	CUSTOMER NO.					
PRODUCT NO.	CG563	REV	A/0	DATE	2017-04-28		
DRAWN BY:	Xiang	CHECKED BY:		APPROVED BY:			