


VCOM USB 2.0 CABLE 80°C 30V (A group of black lettering)

REV	DESCRIPTION	DATE
A/0	Initial issue	2017-04-26

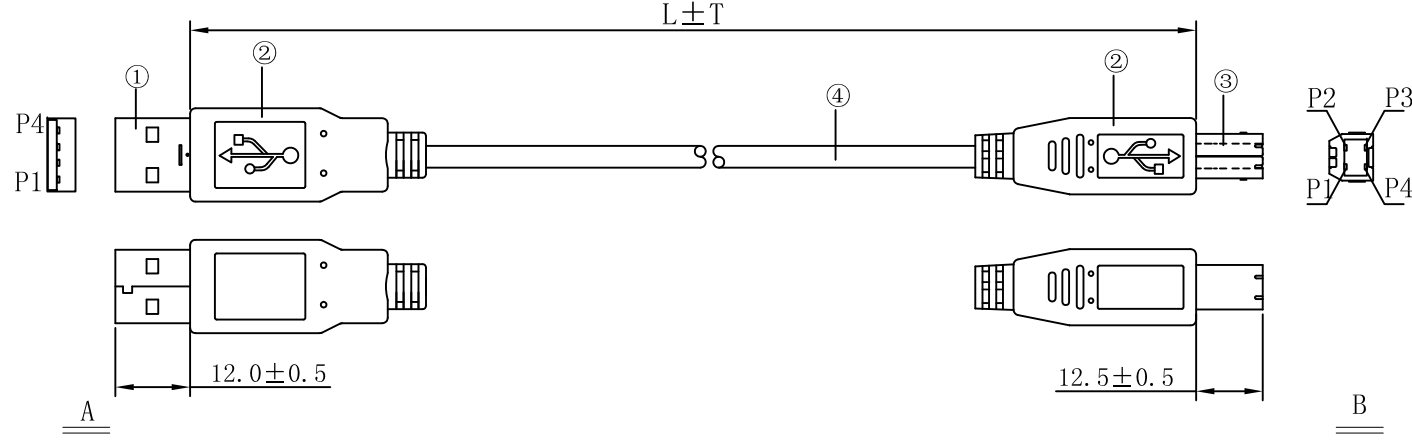

WIRING TABLE:

<u>A</u>	<u>B</u>
1	1
2	2
3	3
4	4
G	G

Twist pair

NO.	Cable length (L)	Cable tolerance (T)
1	1500MM	20MM
2	1800MM	20MM
3	3000MM	30MM
4	4500MM	50MM
5	5000MM	50MM

Test Conditions:

- 100% open & short circuit test;
- Insulation Resistance: 2.0Mohm (MIN);
- Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .

**VCOM** VCOM INTERNATIONAL LTD.

④	CABLE: [30#*1P+28#*2C+AL/MY+DW+BD], OD:4.5mm, PVC JACKET, TRANSPARENT	M		
③	USB B MALE SOLDERING TYPE, NICKEL-PLATED PBT WHITE COLOR	SET		
②	OVER MOLDING:PVC-50P TRANSPARENT PVC	g		
①	USB A MALE SOLDERING TYPE, NICKEL-PLATED PBT WHITE COLOR	SET		
NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY

ITEM	USBAM/BM 2.0V	CUSTOMER	UNIT	mm	PAGE:1of1
PART NO.	VC-F02-0018	CUSTOMER NO.	SCALE		
PRODUCT NO.	CU201-TW	REV:	A/0	DATE	2017-04-26
APPROVED BY:		CHECKED BY:		DRAWN BY:CT	