



VCOM 80°C 30V VW-1 SUPER SPEED USB 3.0V CABLE (A group of White lettering)

REV	DESCRIPTION	DATE
A/0	Initial issue	2017-04-27

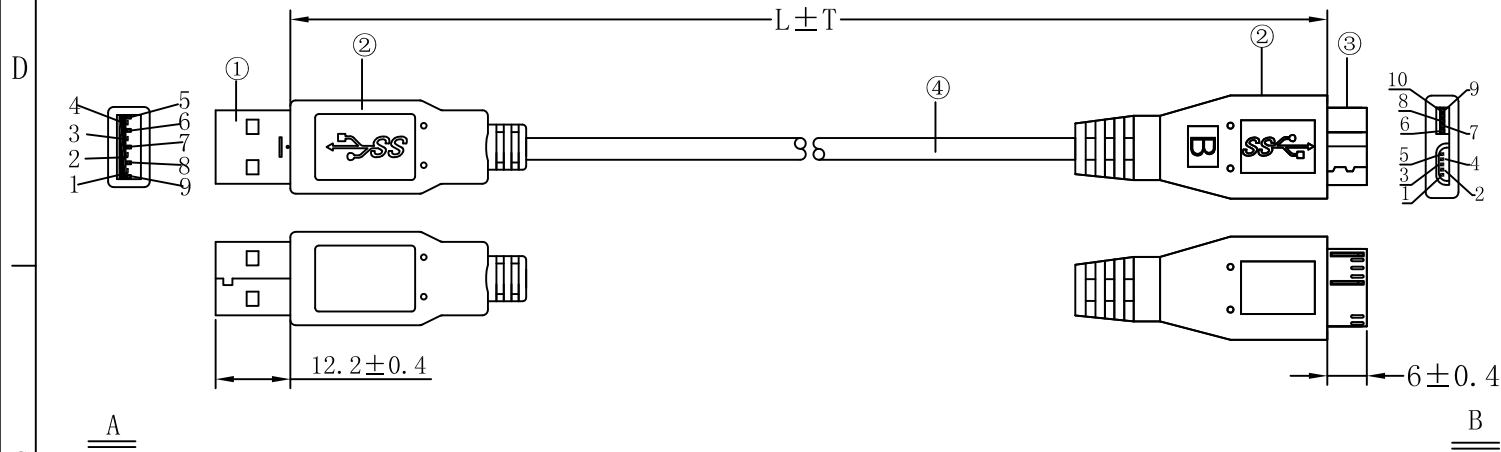

WIRING TABLE:

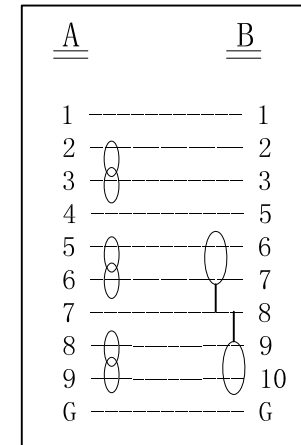

⊗ Twist pair

NO.	Cable length (L)	Cable tolerance (T)
1	500MM	10MM
2	1000MM	10MM
3	1500MM	15MM
4	1800MM	20MM
5	3000MM	30MM

Test Conditions:

- 100% open & short circuit test;
- Insulation Resistance: 2.0Mohm (MIN);
- Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .
- Test:Theory of data rate 5Gbps(625MB/S),
The measured velocity data150MB/S.

④	CABLE: [(28AWG*1P+DW+AL/MY+MYLAR)*2P+28AWG*1P+24AWG*2C]+AL/MY+DW+BD] JACKET BLUE OD:5.5mm, VCOM LETTERING	mm			
③	PLUG:USB3.0 Micro B MALE SOLDERING TYPE, NICKEL-PLATED PBT BLUE COLOR	PCS			
②	OVER MOLDING:PVC-50P BLUE PVC	g			
①	PLUG:USB3.0 A MALE SOLDERING TYPE, NICKEL-PLATED PBT BLUE COLOR	SET			
NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY	MOLD NUMBER

VCOM VCOM INTERNATIONAL LTD.

ITEM	USB3.0 AM/MicroBM	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F02-0043	CUSTOMER NO.		SCALE		
PRODUCT NO.	CU311	REV	A/0	DATE	2017-04-27	
APPROVED BY:		CHECKED BY:		DRAWN BY:	CT	