


REV	DESCRIPTION	DATE
A/0	Initial issue	2017-05-15

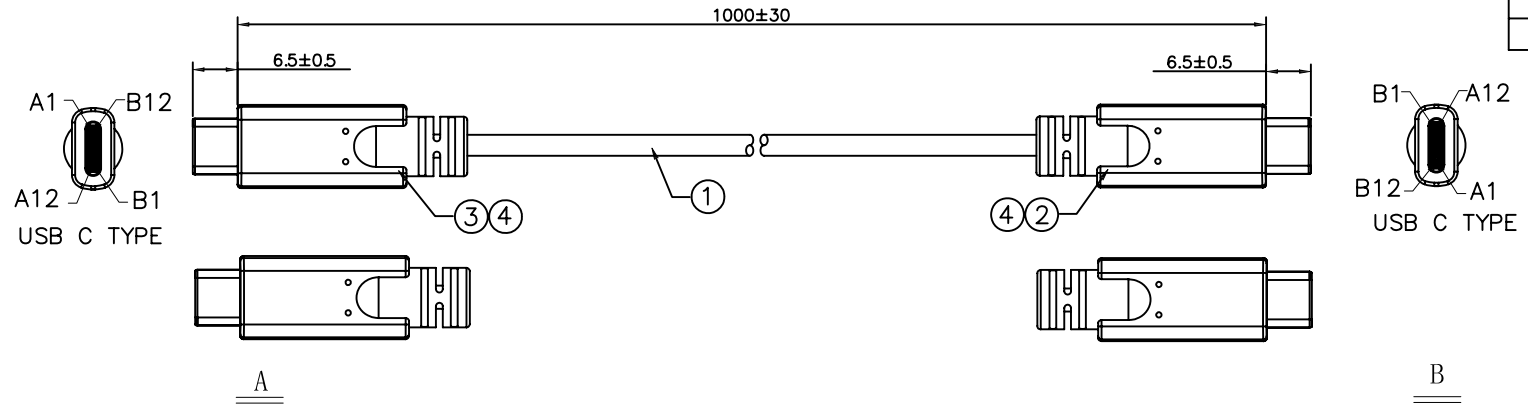

WIRING TABLE:

USB C TYPE	GND_PWRrt1[rt2]	USB C TYPE	SIGNAL
A1,B1,A12,B12	PWR_VBUS1	A1,B1,A12,B12	GND
A4,A9	PWR_VBUS2	A4,A9	VBUS
B4,B9	CC	B4,B9	VBUS
A5	IC	A5	CC
B5	UTP_Dp(USB D+)	B5	VCONN
A6	UTP_Dn(USB D-)	A6	Dp1
A7	SDPp1	A7	Dn1
A2	SDPn1	B11	SSRXp1
A3	SDPp2	B10	SSRXn1
B11	SDPn2	A2	SSTXp1
B10	SDPp3	A3	SSTXn1
B2	SDPn3	A11	SSRXp2
B3	SDPp4	A10	SSRXn2
A11	SDPn4	B2	SSTXp2
A10	SBU_A	B3	SSTXn2
A8	SBU_B	B8	SBU2
B8	BRAID	A8	SBU1
SHELL		SHELL	SHIELD

Twist pair

- Test Conditions:
- 100% open & short circuit test;
  - Insulation Resistance: 10.0Mohm (MIN);
  - Conduction Resistance: 3.0ohm (MAX) at 300V DC/0.01S .

④	OUTER MOLDED: 45P PVC, COLOR: BLACK .	SET		
③	CONN:USB C TYPE MALE, WITH IC, INSIDE BLACK, NICKEL PLATED PLUG .	SET		
②	CONN:USB C TYPE MALE, INSIDE BLACK, NICKEL PLATED PLUG .	g		
①	CABLE: (1C+SP+FPA)*8C+1P+2C+4C+AB, OD=4.80±0.15MM, JACKET COLOR: BLACK .	M		
NO.	The material content	UNITS	QUANTITY	Mould NO.

**VCOM** VCOM INTERNATIONAL LTD.

ITEM	USB3.1 CM/CM+IC	CUSTOMER		UNITS	mm	PAGE: 1 of 1
PART NO.	VC-F03-0002	CUSTOMER NO.		SCALE		
PRODUCT NO.	CU420	REV:	A/0	DATE	2017-11-15	
APPROVED BY:		CHECKED BY:		DRAWN BY:	XGS	