


VCOM USB 2.0 CABLE 80°C 30V (A group of White lettering)

REV	DESCRIPTION	DATE
A/0	Initial issue	2017-04-27

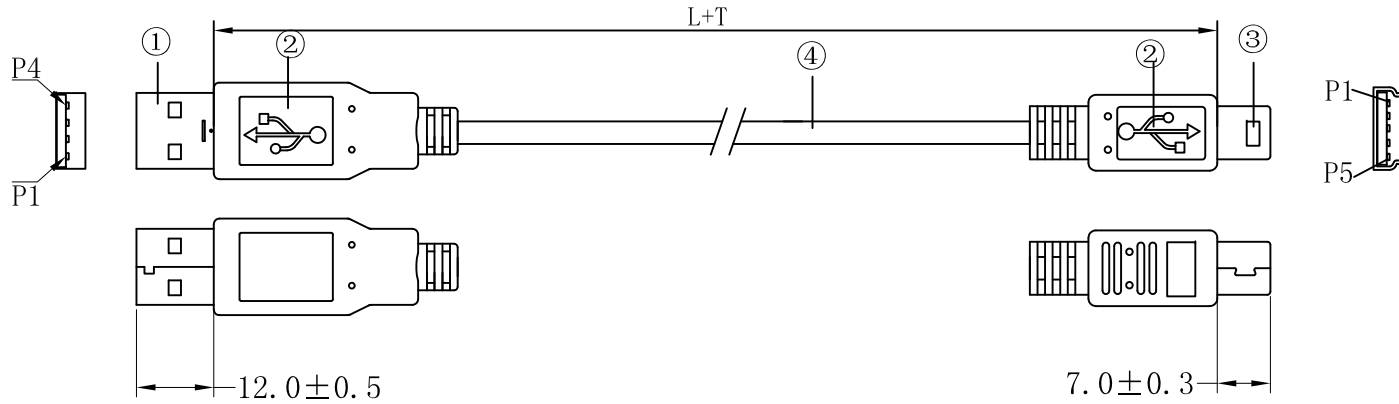

WIRING TABLE:

<u>A</u>	<u>B</u>
1	1
2	2
3	3
4	5
G	G

<u>A</u>		
NO.	Cable length (L)	Cable tolerance (T)
1	500MM	10MM
2	800MM	10MM
3	1000MM	10MM
4	1200MM	10MM
5	1500MM	15MM
6	1800MM	20MM
7	3000MM	30MM
8	5000MM	50MM

Test Conditions:

- 100% open & short circuit test;
- Insulation Resistance: 2.0Mohm (MIN);
- Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .

VCOM INTERNATIONAL LTD.

TITLE	USBAM-MINUSB5PM	CUSTOMER	AC	UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F02-0034	CUSTOMER NO.				
PRODUCT NO.	CU215	REV	A/0	DATE	2017-04-27	
APPROVED BY:	CHECKED BY:		DRAWN BY: CT			

④	CABLE: 30AWG*1P+28AWG*2C+AL/MY+DW+BD JACKET BLACK OD: 4.5±0.15MM	mm			
③	PLUG: MINUSB5PM SOLDERING TYPE, NICKEL-PLATED , PBT BLCAK COLOR	SET	1	S-U08A	
②	PVC-50P BLACK PVC	g			
①	PLUG: USB AM SOLDERING TYPE, NICKEL-PLATED , PBT WHITE COLOR	SET	1	S-U07A	
NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY	