


REV	RESRIPTION	DATE

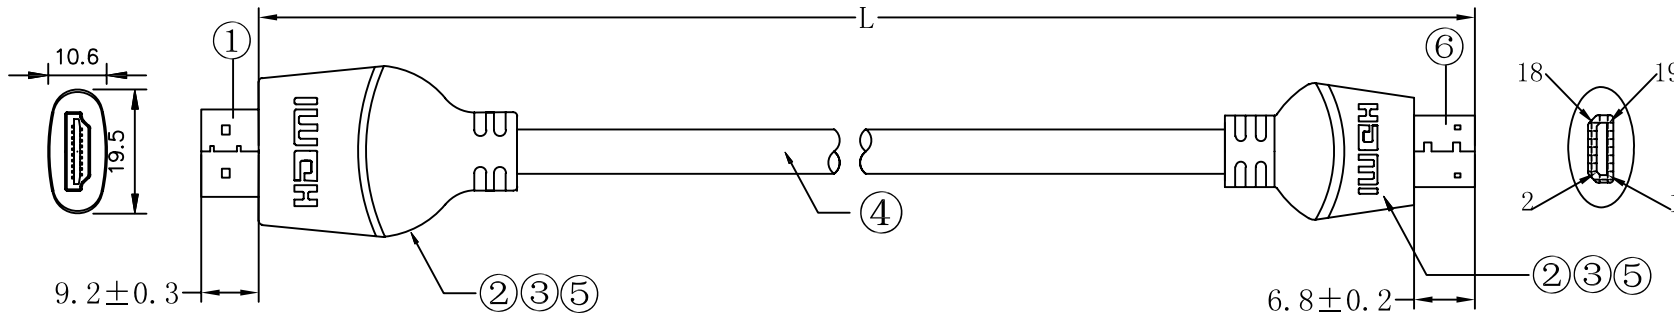


A

VCOM AWM 20276 80°C 30V VW-1 High Speed HDMI Cable With Ethernet

B

Cable length (L)	Tolerance (T)
1800	20
3000	30

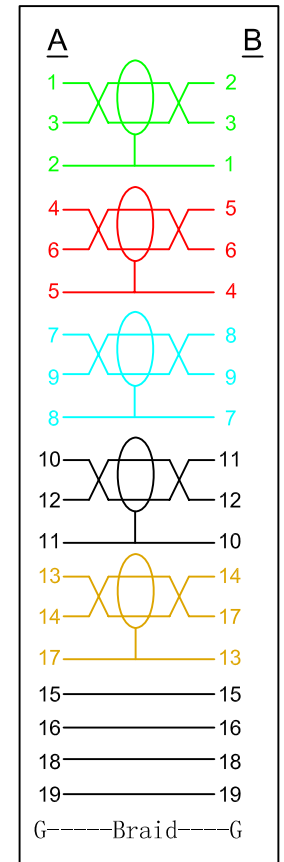

NOT: COAX

**Test Conditions:**

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN);
3. Conduction Resistance: 10ohm (MAX) at 300V DC/0.01S .

NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY	MOLD NO. :
⑥	CONN:HDMI C Type, Male, 19PIN SOLDERING TYPE GOLD PLATED		PCS	1	
⑤	INNER MOLDING:HDPE		EACH	1	
④	CABLE: [(30AWG*1P+DW+AL Foil+MYLAR)*5P+1P+2C]+AL Foil+DW+BD 1.4V, OFC Conductor BLACK OD:6.0mm		mm	L	
③	OVER MOLDING 2:45P PVC ORANGE		EACH	1	
②	OVER MOLDING 1:50P PVC BLACK		EACH	1	
①	CONN:HDMI A Type, Male, 19PIN SOLDERING TYPE GOLD PLATED		PCS	1	



**VCOM International Ltd.**

TITLE	HDMI A/M-C/M 1.4V	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F14-0021	CUSTOMER NO.				
PRODUCT NO.	CG581	REV	A/0	DATE	2017-04-28	
DRAWN BY:	Xiang	CHECKED BY:		APPROVED BY:		